


Key

Description of the material

- 1 AQUAPANEL® Cement Board Indoor
- 1a AQUAPANEL® Cement Board Floor
- 1b AQUAPANEL® Cement Board Floor MF
- 2 Impact sound insulation board
- 3 Covering Board e.g. Wood Fibreboard, Gypsum board
- 4 AQUAPANEL® Levelling Fill
- 5 AQUAPANEL® Biscuits
- 6 Barrier
- 7 Moisture barrier, if required
- 10 Load-bearing insert
- 11 Floors made of boards or chipboard
- 12 Nogging / wooden lath / underlay board >19 mm
- 13 Stop board
- 17 Heat-conducting layer or heat-conducting plate
- 18 Heating pipes
- 19 Mould plates made of PS or PUR
- 20 Elastischer, fungizider Fugenfüller
- 22 Surface sealing
- 23 Ceramic covering
- 24 Special section
- 25 Edge insulation strips
- 26 Pipe enclosure
- 27 Pipe collar
- 29 Electric floor heating
- 30 Thin bed adhesive

- A Wood boards, d = 21 mm
- B Wood joist 120/180, spacing 62,5 cm
- C Sand filling, d = 50 mm
- D Blind floor, chipboards, d = 19 mm
- E Mineral fibre insulation boards, d = 40 mm
- F Spring tracks, d = 27 mm
- G Knauf gypsum plasterboards, d = 12,5 mm
- H Vibration bracket
- I Wood able laths, 24 x 48 mm
- J Cavity insulation, mineral fibre, 100 mm

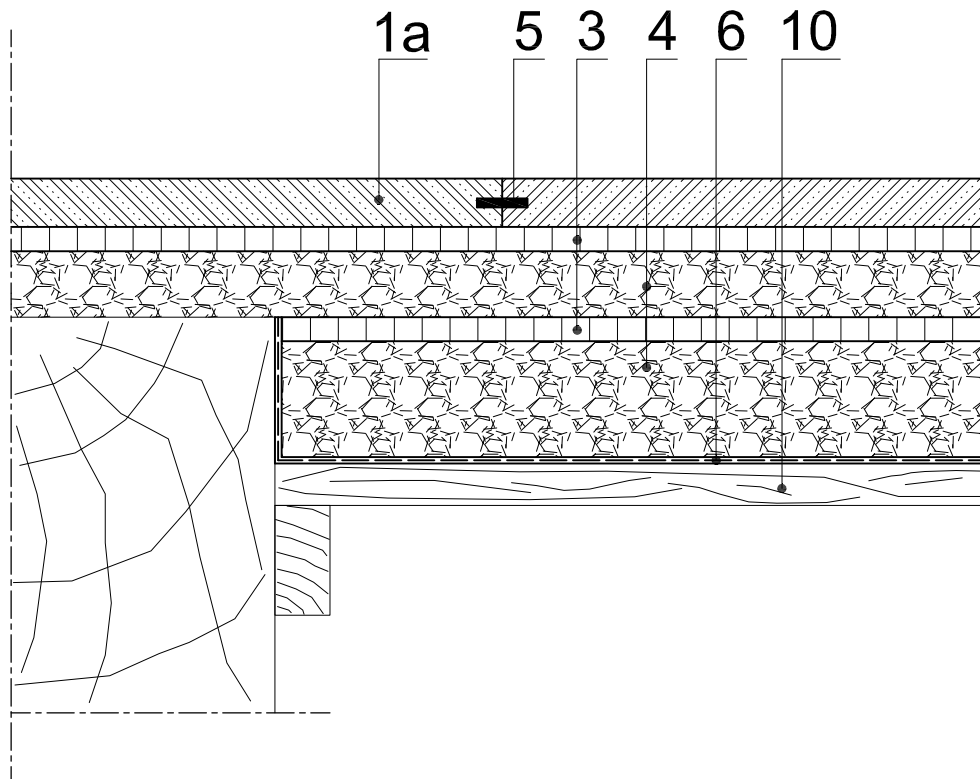

Drawing: F 20
scale: 1/ 2,5

Module - Timber beam ceiling

version: 04/2008

Knauf Aquapanel GmbH & Co. KG

Zur Helle 11
58638 Iserlohn
Deutschland
aquapanel.info@knauf.com